

SRI2000-DSLAM-8 with NT200-R Plus Bundle

Hardened ADSL2/2+ Digital Subscriber Line Access Multiplexer (DSLAM)
8 ADSL2/2+ CPE (Customer Premise Equipment) Modems

KEY FEATURES:

- The SRI2000-DSLAM-8 offers a lower port count. It provides the most cost-effective initial investment solution for Traffic and Data Communications Network Service providers.
- The SRI2000-DSLAM-8 is an 8 port IP based ADSL2+ DSLAM with the POTS splitter built-in. It terminates all the ATM circuits and converts traffic directly to deliver broadband IP services for providers who want to offer high speed access services in low subscriber density locations on existing copper twisted pair telephone, traffic network, and generic copper lines.
- The SRI2000-DSLAM-8 is also backwards compatible with early versions of ADSL.
- The SRI2000-DSLAM-8 is compliant with ITU G.992.5, G.992.3, G.992.1, The G.992.5 ADSL2+ technology is an enhanced version of ADSL technology which provides cross-talk free deployment.



SPECIFICATIONS:

- Supports ANSI T1.413 Issue 2, ITU G.992.5, G.992.3, G.992.1 (G.dmt), ITU-T G.992.2 (G.lite)
- 1 10/100 BASE-TX port, half/full duplex with auto-negotiation
- 1 SRI2000 ADSL2/2+ DSLAM
- 8 ADSL2/2+ Modems
- Supports Annex M
- Supports 802.1P, STP
- Supports 802.1Q
- Multimode (automatic modulation detection)
- Supports packet transmit and receive statistics report
- Supports NAT
- Supports DHCP server
- Supports DHCP relay
- Supports multiple PVC QoS, up to 8 PVC per port
- Provides optimal rate/reach performance
- Higher rates (up to 24.0 Mbps)
- Longer reach (up to 6.5 Km, 4 mi)
- Bandwidth Management control on each port at 32kbps intervals

NETWORK CONFIGURATION MODES:

- Gateway
- Router
- Bridge

MANAGEMENT:

- Web based management
- SNMP-based GUI EMS
- Local RS-232 CLI
- Remote in-band SNMP/TELNET management
- Firmware upgradeable via web, FTP or TFTP

HARDWARE CONFIGURATION:

- 1 RJ45 for Uplink and Cascade
- 1 TELCO-36 connectors (including 16 pairs phone line) link to PSTN (8 pairs) and ADSL2+ users (8pairs)
- 1 DB9 male (Null Modem) for Local Management

PHYSICAL SPECIFICATIONS:

- Dimensions: 440mm/17.3in(W) x 224mm/8.8in(D) x 44.5mm/1.75in(H)
- Weight: 4.5Kg/9.9lb

INPUT POWER:

- AC Power Model: 90VAC ~ 260 VAC, 50-60 Hz
- DC Power Model: -40VDC ~ -60 VDC
- Power Consumption: 20 watts


OPERATION PARAMETERS:

- Operating Temperature: -40 to 74°C
- Storage Temperature: -40~+80°C
- Operating Humidity: 5% to 95% non-condensing
- Operating Altitude: -200ft to +15,000ft
- Reliability: MTBF 140,000 hours minimum

INCLUDED ACCESSORIES:

- TELCO-36 Cable
- DB9 male (Null Modem) Cable

Specifications are subject to change without notice.

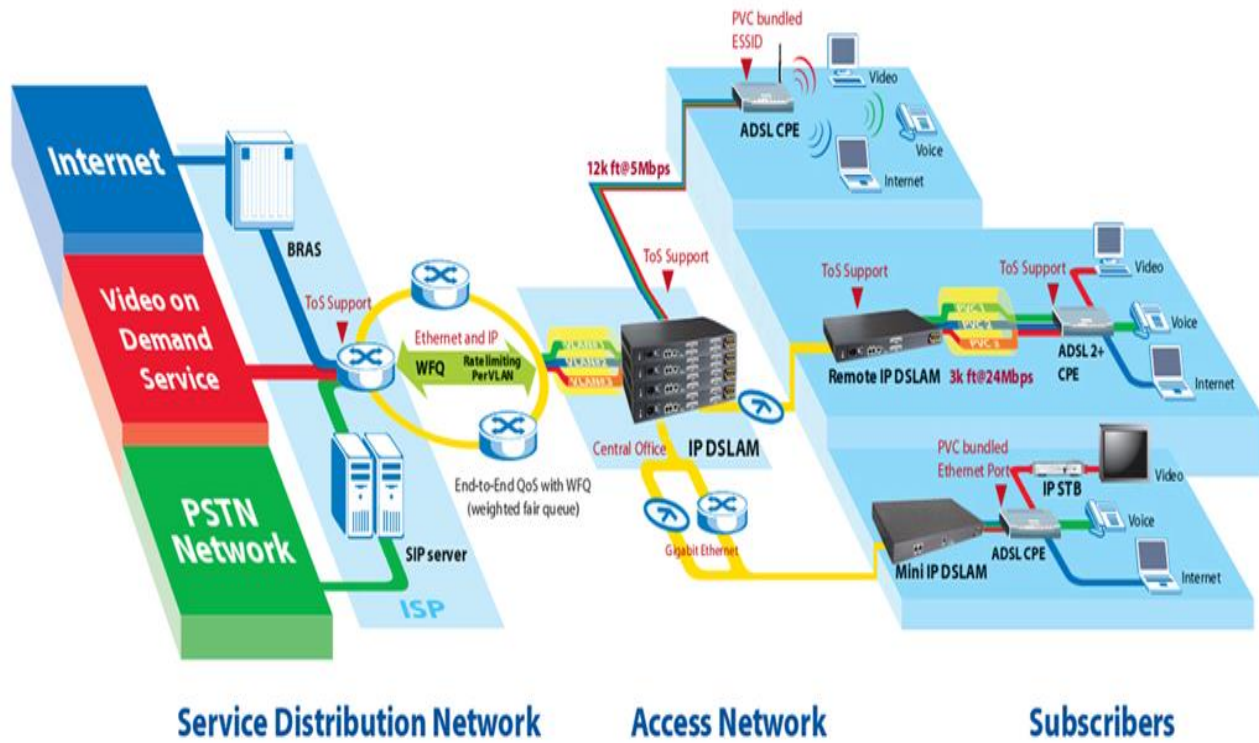

eXtreme copper

Corporate Office
 107 N. Reino Road
 Suite 233
 Newbury Park, CA 91320

Research & Development Center
 2243 Agate Court
 Unit E
 Simi Valley, CA 93065

Contact Information
 Phone: 818.230.2477
 Fax: 818.292.8590
 sales@extremecopper.com

www.extremecopper.com